




AERO BLADE

Install the cover in cold or rain conditions for higher tyre and wheel temperature

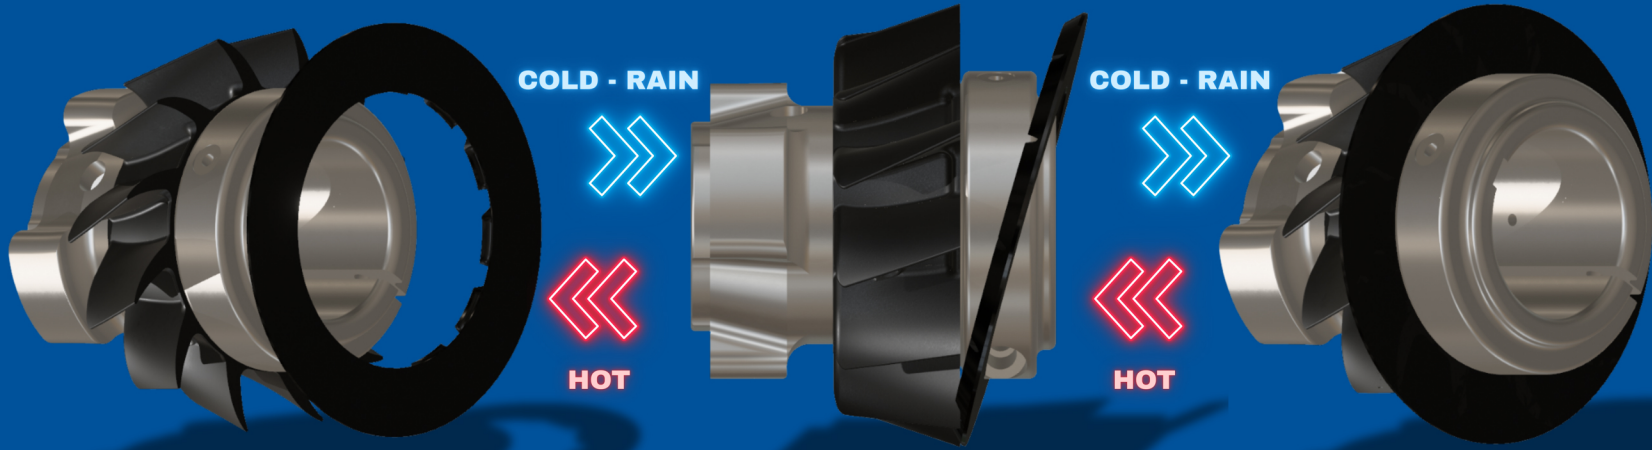

Remove the cover in hot conditions for lower tyre and wheel temperature

Make sure to pull the cover over the Allen bolt before sliding it over the hub. By placing it behind the bulge, you can align it with the Aero Blade. Once the cover is aligned with the Aero Blade, press it down until you hear a "click" to secure it in place. Repeat this process for the entire cover.